



1A: SYNC APP TO SENSOR

Install & Open
Mopeka Check App




Press & hold Sync until sensor
appears in app, (up to 10 seconds)

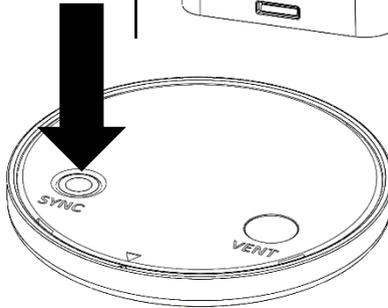

1B: SYNC DISPLAY TO SENSOR


Remove display battery
strip

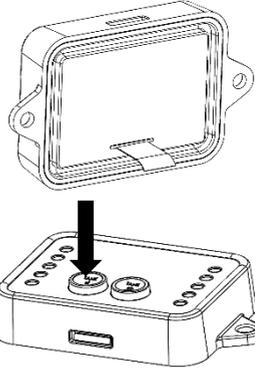


Press and hold first button,
until lights start flashing

Press & hold Sync until lights
stop flashing (up to 10
seconds)


- 2: INSTALL SPACERS ON TANK FOOT RING
- 3: ASSURE TANK BOTTOM IS CLEAN AND WITHOUT EXCESSIVE PAINT BUILD-UP



4: INSTALL SENSOR ON TANK BOTTOM

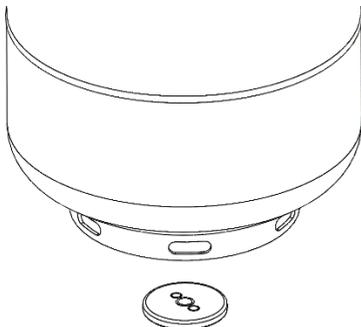

Apply sonic grease to rubber
pad between magnets.
This rubber pad must line up
with center bottom of tank



INTENDED USE OF THE M1017 SENSOR IS TO MEASURE THE AMOUNT OF LIQUID PROPANE INSIDE A PROPANE TANK MEETING THE SPECIFICATIONS SHOWN IN THE PRODUCT MANUAL UNDER THE CONDITIONS LISTED BELOW.

SEE www.mopeka.com FOR MANUAL

WARNING

USE OF THIS DEVICE IN A MANNER OTHER THAN STATED IN THIS MANUAL, MAY RESULT IN IMPAIRMENT OF THE DESIGNED SAFETY PROTECTION AND THUS AN UNSAFE CONDITION.

WARNING

EXPLOSION HAZARD-BATTERIES MUST ONLY BE CHANGED IN AN AREA FREE OF IGNITABLE CONCENTRATIONS.

WARNING

THIS DEVICE IS NOT TO BE REPAIRED OR OTHERWISE MODIFIED.

WARNING

THIS DEVICE IS INTENDED FOR OUTDOOR USE ONLY.